

TT 04H

TWO WIRE SMART TEMPERATURE TRANSMITTER



Features

- HART Compatible 4-20 mA current output
- Accept RTD and all types of thermocouple input
- Single & Dual sensor inputs
- Backlight LCD display with local operator interface
- Sensor Redundancy
- Peak Value Measurement / ΔT Measurement options
- ATEX (Exid) Certified

Description

Electronet Series TT-04H are temperature transmitters used for various industrial applications. It can accept input from RTD, all types of thermocouples & temperature signal is transmitted in the form of electrical 4 - 20 mA signal. The on-line temperature indication is provided through LCD. Span / Zero adjustments are easily accessible .



Technical Specifications

Performance Characteristics		
Type of Input	1) RTD (PT-100/PT-200)	2) Thermocouple (B, E, J, K, R, S, T)
	3) Resistance	4) millivolt (0 to 100 mV)
Output	4-20 mA with HART	
Display	LCD Display	
Isolation	1 kV between Input, Output & Power Supply	
Accuracy	$\pm 0.1\%$ F. S	
Power Supply	24V DC Two Wire Loop Powered	
Power Consumption	< 50 mW	
Response Time	< 300 mSec	
Temperature Coefficient	$\pm 0.01\%$ per $^{\circ}\text{C}$	
MOC Electronics Enclosure	Die Cast Aluminum / SS316	
Ambient Conditions	Temperature : -20 to 70°C , Humidity : 5 to 95% non condensing	
Electrical Connection	$\frac{1}{2}$ " NPT (F) / M20 X 1.5 (F) / DIN 43650 Connector	
Mounting	DIN Rail, Direct Line Mount & Pipe Mount	
Calibration	Software calibration	
Turn-on Time	Less than 5 seconds	
Power Supply Effect	Less than $\pm 0.005\%$ of span per volt	
Surge Protection	In-built	
EMC	EMC compliance with IEC-61000-4-3 & IEC-61000-4-6	
Repeatability	$\pm 0.1\%$	
Linearity	$\pm 0.05\%$ of Full Scale	
Stability	$\pm 0.2\%$ of URL / year	
Reverse Polarity	In-built provided	
Self Diagnosis	Sensor open indicator	
Certification	CE & Ex ATEX Certification : ATEX (II 2 GD Ex d IIC T6 Gb $-20^{\circ}\text{C} \leq T_a \leq +60^{\circ}\text{C}$)	

Note: Accuracy specified is for RTD input, for other type of inputs please refer instruction manual.



TT 04H

TWO WIRE SMART TEMPERATURE TRANSMITTER

Range Table


Sensor Options	Input Ranges		Recommended Min. Span		Accuracy
	°C	°F	°C	°F	
2-, 3-, 4-wire RTDs					
PT 100	-200 to 850	-392 to 1562	85	156	±0.1% of SPAN
PT 200	-200 to 850	-392 to 1562	85	156	±0.1% of SPAN
Thermocouples					
Type B	0 to 1000	0 to 1832	100	183	±0.25% of SPAN
Type E	-270 to 1000	-518 to 1832	100	183	±0.25% of SPAN
Type J	-210 to 1200	-410 to 2192	120	219	±0.25% of SPAN
Type K	-270 to 1370	-518 to 2498	137	249	±0.25% of SPAN
Type R	-50 to 1760	-122 to 3200	176	320	±0.25% of SPAN
Type S	-50 to 1760	-122 to 3200	176	320	±0.25% of SPAN
Type T	-270 to 400	-518 to 752	40	75	±0.25% of SPAN

Assembly Overview

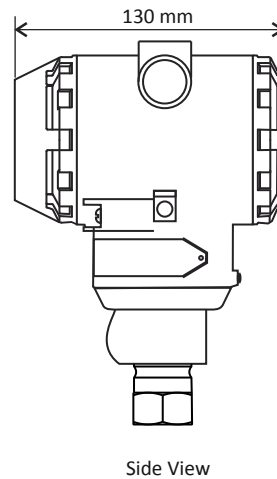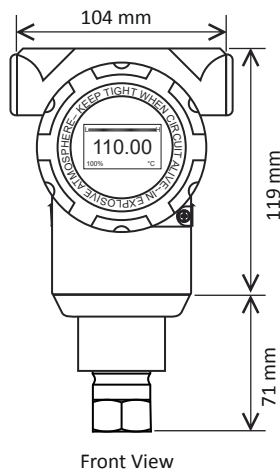


Mounting Details

Pipe Mounting

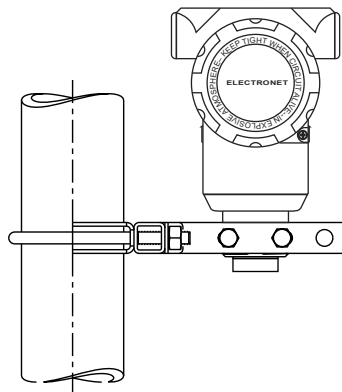

Panel Mounting

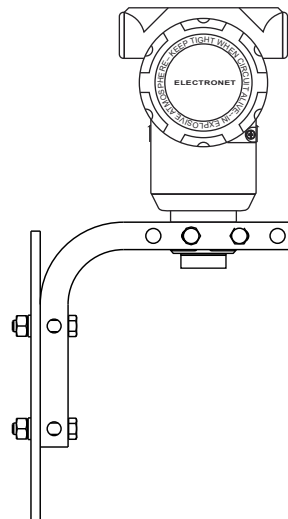


TT 04H


TWO WIRE SMART TEMPERATURE TRANSMITTER



Single Sensor Connection Diagram

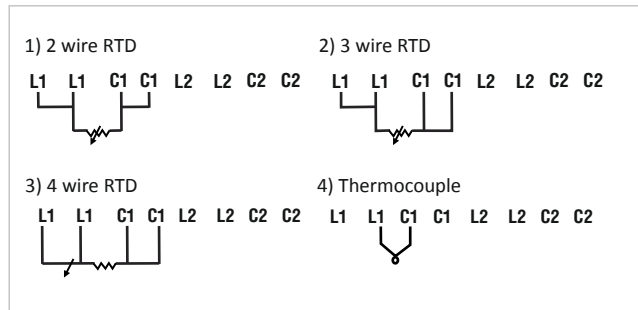

Dual Sensor Connection Diagram

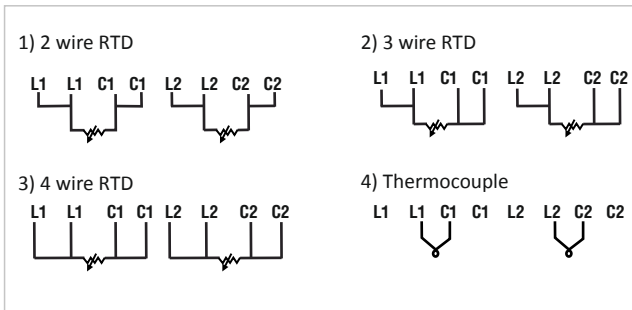

Ordering Information

Sample Order Code : TT04H- TX1-A1-B1-C1-D1-E1-F1-G1

	Parameter	Code	Description
TX	Transmitter Mounting Type	TX 1	DIN Rail
		TX 2	2 Inch Pipe Mount
A	Type of Input	A1	RTD
		A2	Thermocouple
		A3	Resistance
		A4	Milivolt (0 to 100 mV)
B	Type of Input Sensor 1	B1	RTD PT-100
		B2	RTD PT-200
		B3	Thermocouple B-Type
		B4	Thermocouple E-Type
		B5	Thermocouple J-Type
		B6	Thermocouple K-Type
		B7	Thermocouple R-Type
		B8	Thermocouple S-Type
		B9	Thermocouple T-Type
		BX	NA
Note : - Due to our continuous product revisions, design specification & model numbers are subject to change without notice. - The stated transmitters do not include temperature sensors. - Any requirement of sensors should be mentioned separately. - Accuracy defined at Lab Conditions. - For other requirement please consult factory. - This product is meant for laboratory/Process application only and not for custody transfer application.			

	Parameter	Code	Description
C	Type of Input Sensor 2	C1	RTD PT-100
		C2	RTD PT-200
		C3	Thermocouple B-Type
		C4	Thermocouple E-Type
		C5	Thermocouple J-Type
		C6	Thermocouple K-Type
		C7	Thermocouple R-Type
		C8	Thermocouple S-Type
		C9	Thermocouple T-Type
		CX	NA
D	Electronics Enclosure	D1	Weather Proof IP 67
		D2	ATEX (II 2 GD Ex d IIC T6 Gb -20°C ≤ Ta ≤ +60°C)
E	MOC Electronics Enclosure	E1	Die Cast Aluminium
		E2	SS316
		E3	ABS Plastic (for Din Rail Mounting Enclosure)
F	Electrical Connection	F1	M 20 x 1.5 (F)
		F2	½” NPT (F)
G	Output	G1	4 to 20 mA
		G2	4 to 20 mA with HART

ELECTRONET EQUIPMENTS PVT. LTD.



Manufacturing Unit - I & Registered Office

Plot No. 84, 85, 86, Tiny Industrial Estate,
Kondhwa Budruk, Pune - 411 048, Maharashtra, India.

Manufacturing Unit - II

Plot No. 8, (SEZ) Phase 1, Kesurdi MIDC,
Khandala, Dist.- Satara Pin: 412 801, Maharashtra, India.

+91-20-26931476 sales@electronet.co.in

Sales Enquiries ☎ +91-9922931722
✉ enquiries@electronet.co.in

Service Support ☎ +91-9922442181
✉ service@electronet.co.in

Logistic Assistance ☎ +91-9922442184
✉ dispatch1@electronet.co.in