

Features

- On-Line Measurement
- Non Volatile memory retains program settings during power failures
- 4-20 mA DC Output / 4-20 mA with HART (Generic)
- Auto / Manual Temperature Compensation
- On-Line Indication through LCD Display
- Simple Operating Interface
- 2 Wire System



Description

Electronet series CT-100S are Conductivity transmitters used for various industrial applications. It can accept input from conductivity electrode of cell constant 0.01 / 0.1 / 1 & conductivity signal is transmitted in the form of electrical 4 - 20 mA signal. The on-line conductivity indication is provided through LCD. Span/Zero adjustments are easily accessible.

Technical Specifications



Type of Input	From Conductivity Electrode		
Cell Constant	0.01 / 0.1 / 1		
Calibration Range	Factory Calibrated	1	0 to 99.99 μ S/cm for cell constant 0.01
		2	0 to 999.99 μ S/cm for cell constant 0.1
		3	0 to 9999.99 μ S/cm for cell constant 1
Power Supply	24V DC Two Wire Loop Powered		
Power Consumption	< 50 mW		
Display	Local display LCD with backlit		
Type of Output	4-20 mA DC Output / 4-20 mA with HART (Generic)		
Electronics Transmitter Accuracy	+/- 0.25% F. S.		
Response Time	< 500 mSec		
Temperature Coefficient	+/- 0.01% per °C		
Temperature Compensation	RTD PT-100 / RTD PT-1000		
Ambient Conditions	Temperature -20 to 70 °C / Humidity 5 to 95% non condensing		
Isolation	1.4 KV between Input, Output & Power Supply		
Sensor Connection	1) Through BNC connector 2) Through Terminals		
Conduit Entry	1) M20X1.5 (F) 2) ½" NPT(F)		
Dimensions	155 mm (H) x 105 mm (W) X 130 mm (D)		
Mounting	2" Pipe Mounting		
Electronic Protection Class	Flame Proof CMRI IIA IIB / Weather Proof IP-67		
Housing	Cast aluminum with epoxy coating NEMA 4X / SS316		
Weight	1kg (Approximate)		
Flow Through Assembly (Optional)	SS316 / PP		
Certification	CE		

CT 100S


TWO WIRE CONDUCTIVITY / TDS TRANSMITTER




Pipe Mounting Panel

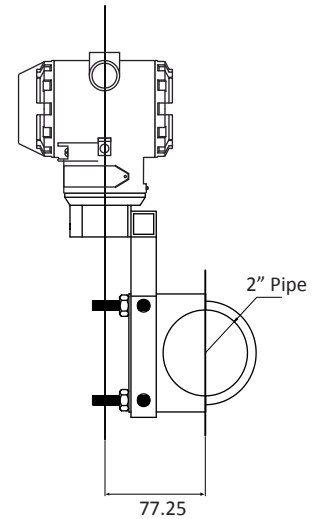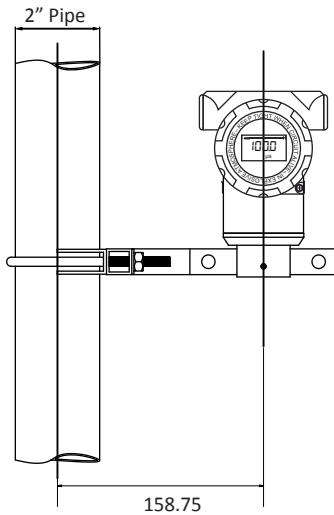

Wall mounting Panel

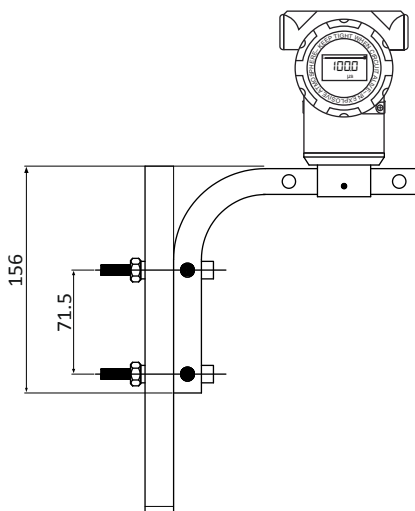

Power Supply & Load Requirements

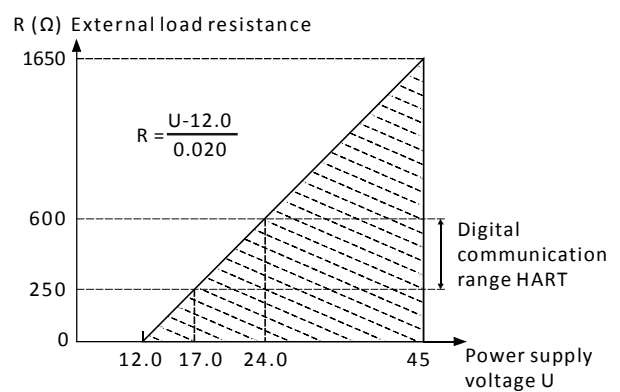


CT 100S

TWO WIRE CONDUCTIVITY / TDS TRANSMITTER



Loop Diagram

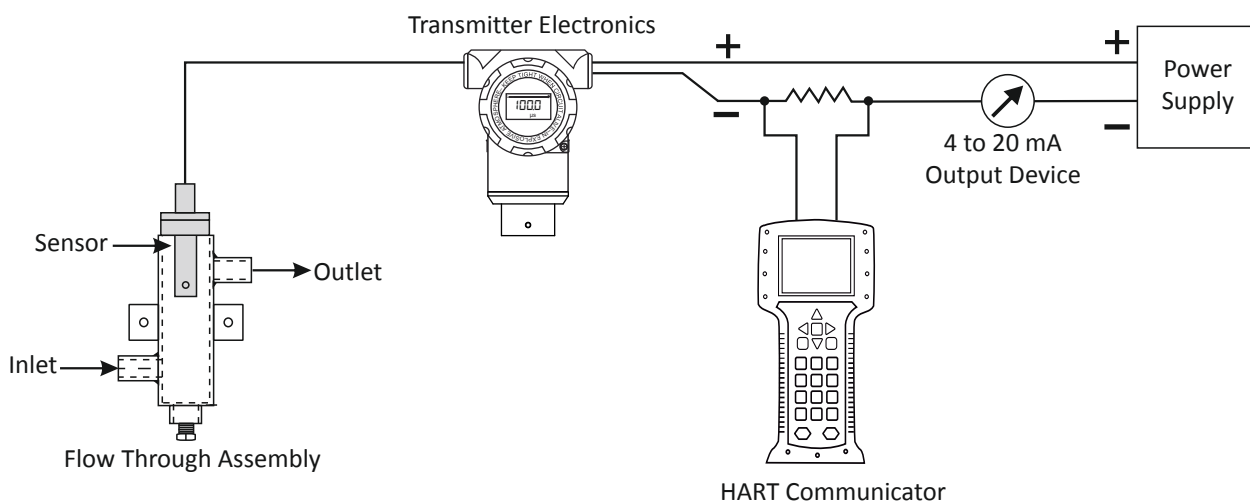

Ordering Information

Sample Order Code : CT 100S-A1-B1-C1-D1-E1-F1-G1

Parameter	Code	Description	Parameter	Code	Description
A	Mounting Type	A1	Panel Mount (96 X 96)	D	MOC Electronics Enclosure
		A2	Field Mount (2"Pipe Mount)		
B	Cell Constant	B1	Conductivity (Cell Constant 0.01) (5 to 100 micro simens)	E	Electrical Connection
		B2	Conductivity (Cell Constant 0.1) (5 to 1000 micro simens)		
		B3	Conductivity (Cell Constant 1) (100 to 10000 micro simens)		
C	Area Classification - Electronic	C1	Weather Proof IP-54		
		C2	Weather Proof IP-67	F	Temperature Compensation
		C3	Flameproof (CMRI IIA IIB Certified)		
G	Output 1	G1	4 to 20 mA		
		G2	4 to 20 mA with HART (Generic)		

Note :
▪ Due to our continuous product revisions, design specification and model numbers are subject to change without notice.
▪ Accuracy defined at Lab Conditions.
▪ For other requirement please consult factory.
▪ Sensor & other accessories to be ordered separately.

▪ This product is meant for laboratory/Process application only and not for custody transfer application.

ELECTRONET EQUIPMENTS PVT. LTD.



Manufacturing Unit - I & Registered Office

Plot No. 84, 85, 86, Tiny Industrial Estate,
Kondhwa Budruk, Pune - 411 048, Maharashtra, India.

Manufacturing Unit - II

Plot No. 8, (SEZ) Phase 1, Kesurdi MIDC,
Khandala, Dist.- Satara Pin: 412 801, Maharashtra, India.

+91-20-26931476 sales@electronet.co.in

Sales Enquiries +91-9922931722 enquiries@electronet.co.in
Service Support +91-9922442181 service@electronet.co.in
Logistic Assistance +91-9922442184 dispatch1@electronet.co.in