

TS2000-HLT

SUBMERSIBLE HYDROSTATIC LEVEL TRANSMITTER - SWITCH



Features

- High Accuracy Piezo Sensor
- Measuring Range upto 500 mtrs.
- Pressure Range 0.4 to 10 bar
- IP-67 Environmental Protection
- Optional PT100 Integration
- 4–20 mA / RS-485 (Modbus RTU) Output
- Suspension clamp, cable gland (Optional)
- SS-316 Corrosion-Resistant Construction



Technical Specifications

Performance Characteristics	
Sensor Type	Piezo Resistive
Max. Measuring Range	0 to 500 mtr.
Pressure Range	0.4 to 10 Bar
Display	Backlight LCD
Output	4 - 20 mA DC
Alarm or Relay Output	1 Relay Output (Optional)
Communication Output	RS-485 MODBUS RTU (Optional)
Output Load	600 Ohm
Accuracy	± 0.25% F. S
Over Pressure Safety	1.5 times max. Pressure range
Burst Pressure	2 times max. Pressure range
Process Temperature	200°C max
Power Supply	18-36 V DC
MOC Electronics Enclosure	SS-316
Electronic Protection Class	Weather Proof IP-67
Electrical Connection	M12 Connector
Response Time	1 Sec
Non Linearity	< 0.2% of SPAN
Non Repeatability	< 0.1% of SPAN
Dielectric Strength	500 VDC
Operating Conditions	Temperature : -20°C to 70°C
	Humidity : 5 to 95% non-condensing
Process connections	Mounting clamp
	Cable Gland
Optional	1) Integrated temperature sensor Pt100, 3-wire
	2) Customer specific cable marking
Electronics Enclosure and Rating	SS-316 and IP-68
Sensor Material	SS-316
Sensor Cable	PVC Shielded

TS2000-HLT

SUBMERSIBLE HYDROSTATIC LEVEL TRANSMITTER - SWITCH



Assembly Overview

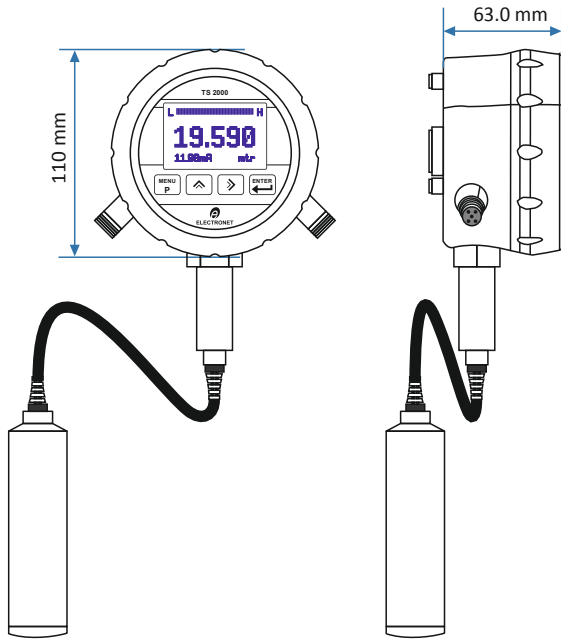


Fig. 1 Front View

Fig. 2 Side View

Connection Details

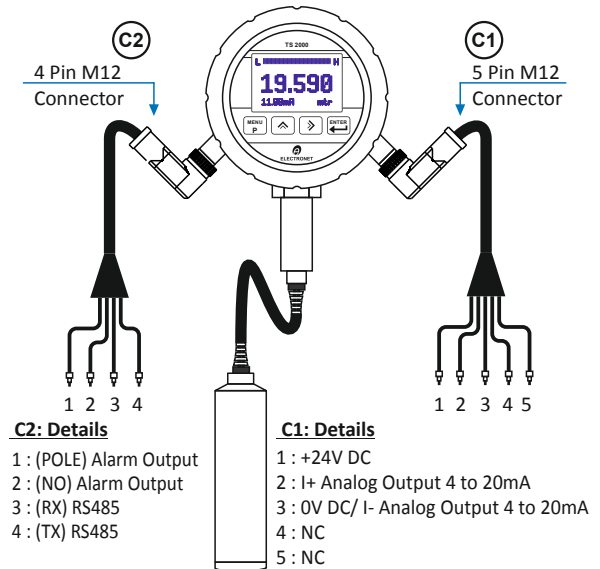


Fig. 3 Front View

Ordering Information

Sample Order Code : TS 2000 HLT -A1-B1-C1

Parameter	Code	Description
A	Level Measurement Range	A1 1000 mm
		A2 5000 mm
		A3 10000 mm
		A4 20000 mm
		A5 50000 mm
		A6 100000 mm
		A7 500000 mm
Parameter	Code	Description
B	Alarm or Relay Output	B1 1 Relay Output
		BX NA
C	Communication Output 1 (Any One)	C1 RS485 (MODBUS RTU)
		CX NA

Note :
 ■ Due to our continuous product revisions, design specification & model numbers are subject to change without notice.
 ■ Accuracy defined at Lab Conditions.
 ■ For other requirement please consult factory.
 ■ This product is meant for laboratory/Process application only and not for custody transfer application.

ELECTRONET EQUIPMENTS PVT. LTD.



Manufacturing Unit - I & Registered Office

Plot No. 84, 85, 86, Tiny Industrial Estate, Kondhwa Budruk, Pune - 411 048, Maharashtra, India.

Manufacturing Unit - II

Plot No. 8, (SEZ) Phase 1, Kesurdi MIDC, Khandala, Dist.- Satara Pin: 412 801, Maharashtra, India.

+91-20-26931476 sales@electronet.co.in

Sales Enquiries ☎ +91-9922931722 ✉ enquiries@electronet.co.in
Service Support ☎ +91-9922442181 ✉ service@electronet.co.in
Logistic Assistance ☎ +91-9922442184 ✉ dispatch1@electronet.co.in